

# CAST

LIGHTING  
LLC.

Must operate lamp between 10.8 -12.0 volts. Optimal voltage is 11.5. Check voltage with digital multi-meter.

Extremely durable solid sand cast 88-6-3-2 bronze body.

Full 0° to 180° seamless knuckle for precise final adjustment.

Black silicone "O" rings.


Heavy duty 100% solid copper fixture stem — .115 wall thickness.

Keep stake top flush w/grade.

Install at 90° to grade.

#16-2 @25' Tin coated marine grade No-Ox<sup>®</sup> wire. Bury wire at 6" depth.

Coil leftover lead wire at base of fixture. This allows for future field adjustment of fixture placement if required.

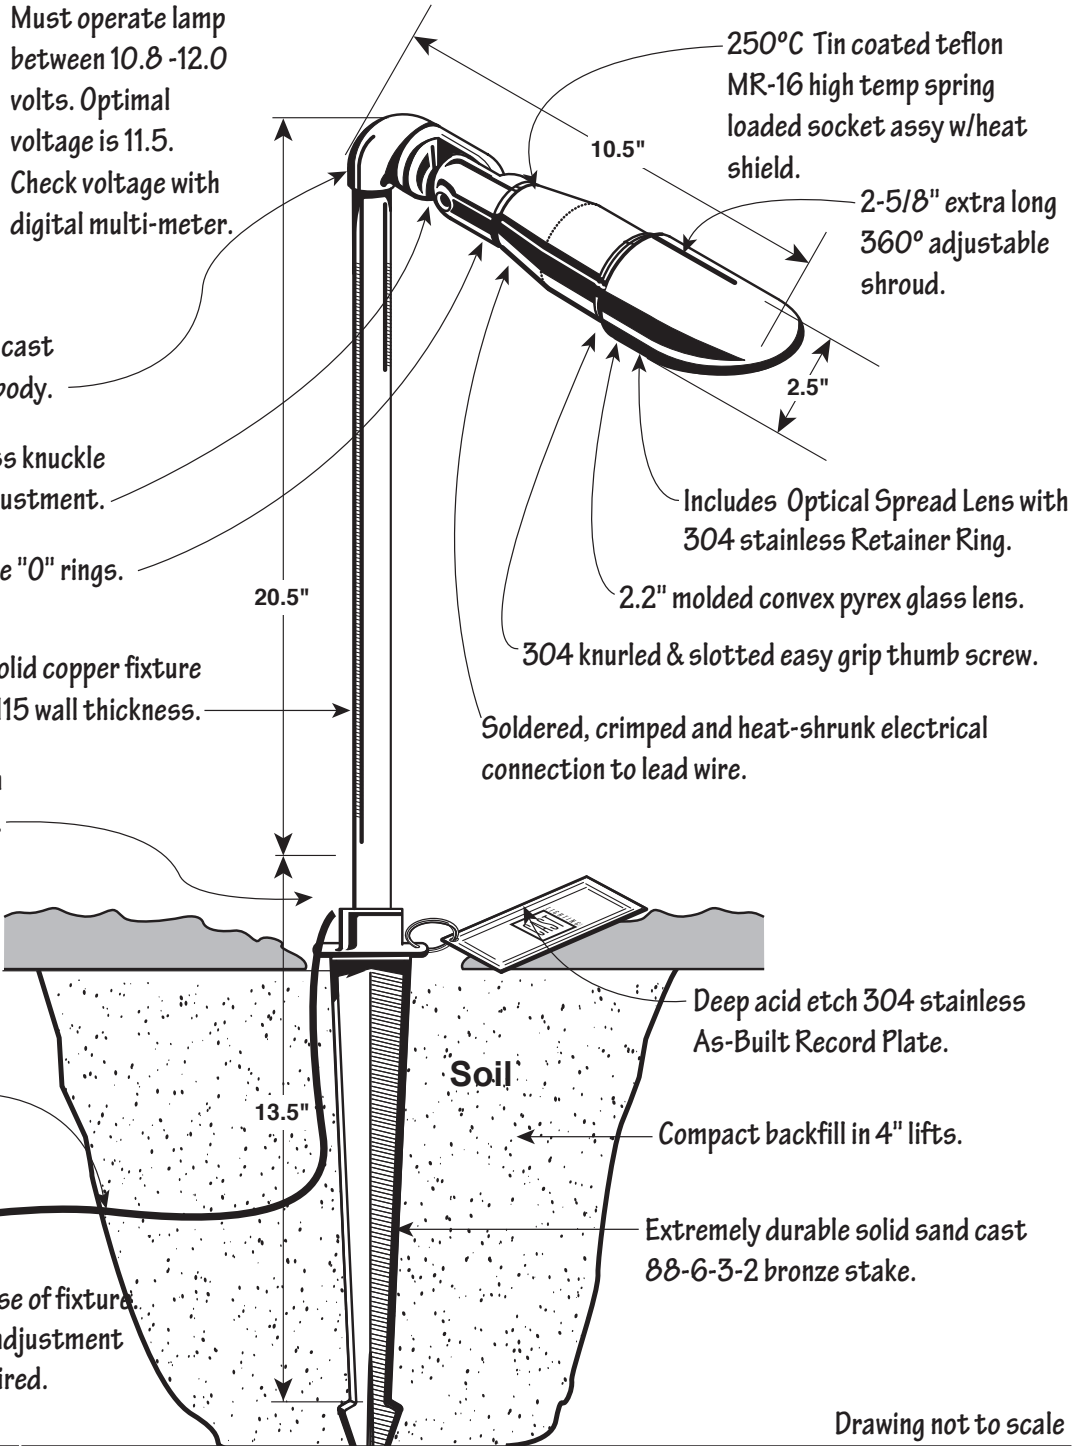

Drawing not to scale

MODEL #	MR-16 Bullet Area Light Typical Installation Detail
<b>CBAL1CB</b>	NOTES: • Max Lamp Rating 50 watt • Use Only Covered MR-16 Lamps • Typical spacing 15' to 20'. • Always refer to product instruction sheet prior to installation.
Rev. 1-04-05	
Plan Symbol: 