





- Must operate lamp between 10.8 -12.0 volts. Optimal range is 11.5. Check voltage with digital multi-meter.
- Surface mount using hardware appropriate for the application. Allow for air flow between canopy & tree (see detail below).
- Recommended mounting height 25' off grade.
- Attach As-Built Fixture Record Tag to Spider Splice Cap.

Bracket can be mounted first, then fixture is set in place.

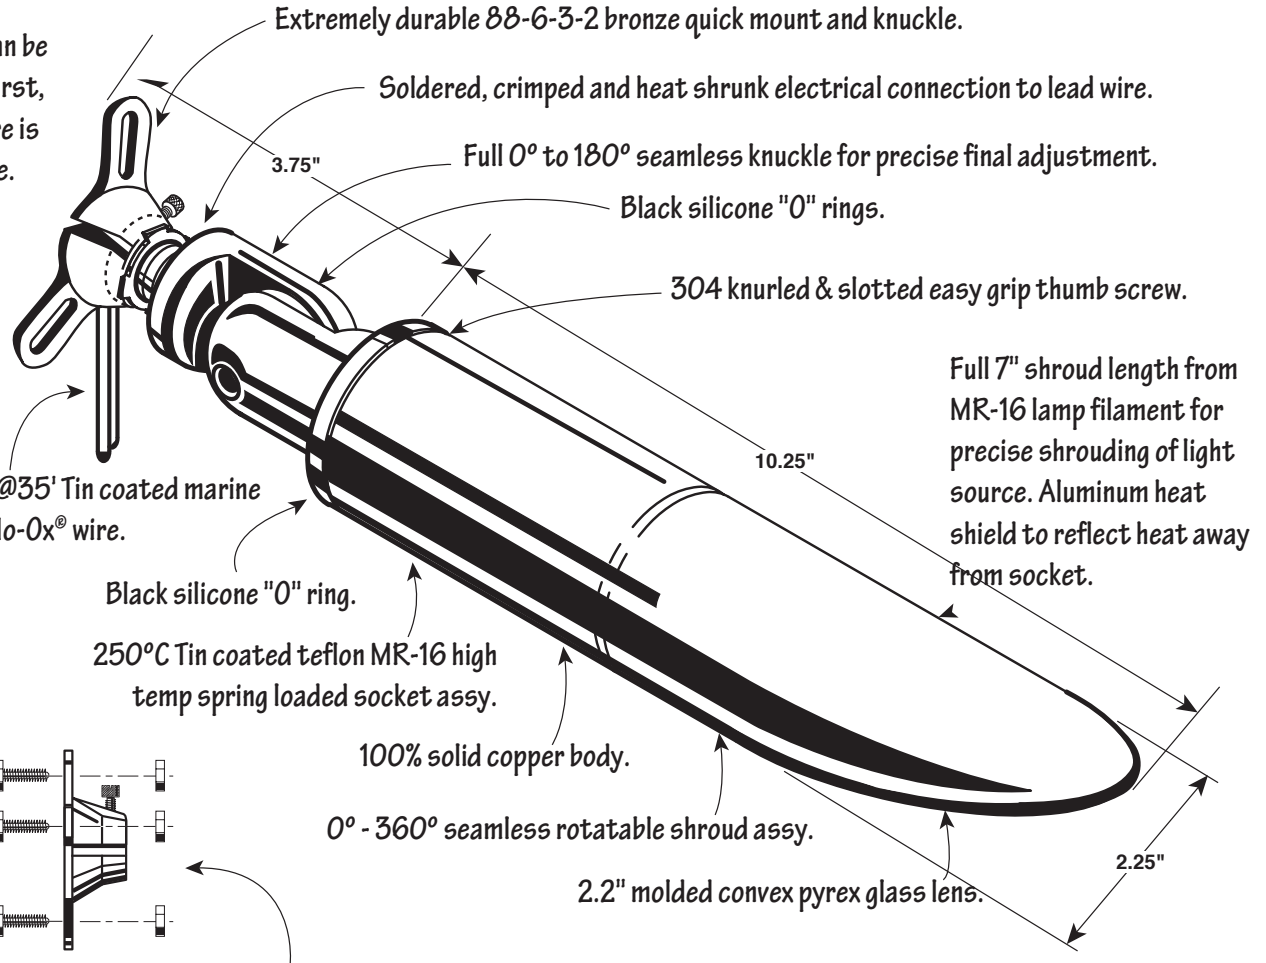

Mounting detail using CAST Tree Mount SS Hanger Bolts. (CTREEH1(24))

Note that bolts allow for breathing space between bracket and tree to prevent tree rot

Drawing not to scale

MODEL #	Copper Tree Light Typical Installation Detail
CCTL1C	NOTES: • Max Lamp Rating 50 watt • Use Only Covered MR-16 Lamps • Accepts optional Honeycomb Louver (CHL1), Optical Spread Lens (COSL1), Optical Frosted Lens (COFL1) and Optical Linear Lens (COLL1). • Always refer to product instruction sheet prior to installation.
Rev. 1-05-05	
Plan Symbol:	