




Must operate lamp between 10.8 -12.0 volts. Optimal range is 11.5. Check voltage with digital multi-meter.

Extremely durable solid sand cast 88-6-3-2 bronze body.

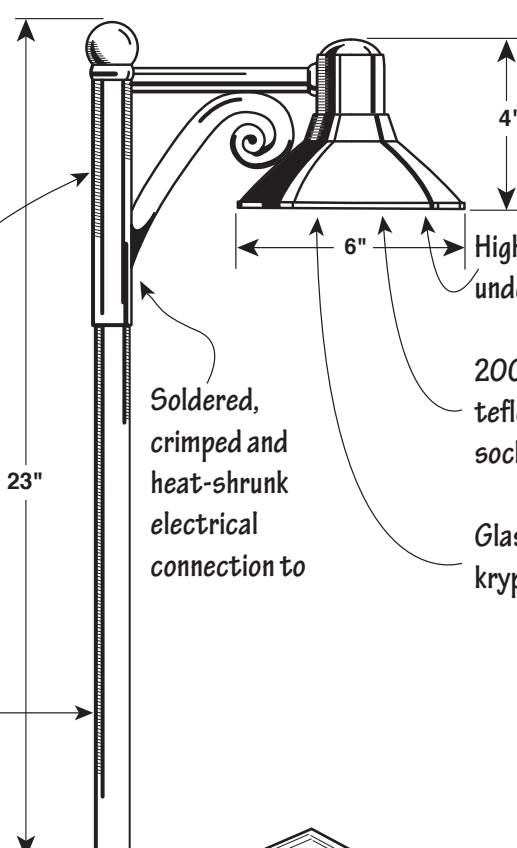


Keep stake top flush w/grade.

Install at 90° to grade.

#16-2 @25' Tin coated marine grade No-Ox[®] wire. Bury wire at 6" depth.

Coil leftover lead wire at base of fixture. This allows for future field adjustment of fixture placement if required.

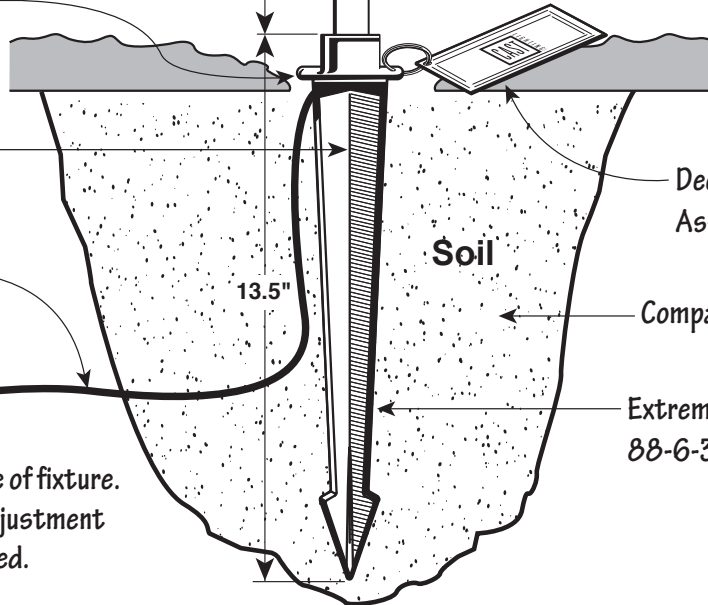

Drawing not to scale

MODEL #	Savannah Path Light Typical Installation Detail
CSA1CB	NOTES: • Max Lamp Rating 35 watt • Includes wedge base Krypton Halogen, 25 watt lamp • Typical spacing 10' to 15'. • Always refer to product instruction sheet prior to installation.
Rev. 1-11-05	
Plan Symbol: 