



Must operate lamp between 10.8 -12.0 volts. Optimal voltage is 11.5. Check voltage with digital multi-meter.

5-3/8" molded convex pyrex glass lens.

Extremely durable solid sand cast 88-6-3-2 bronze body.


Glass wedge base 25 watt krypton lamp light source.

200° high temp tin-coated teflon wedge base composite socket.

304 knurled & slotted easy grip thumb screws.

Soldered, crimped and heat-shrunk electrical connection to lead wire.

Heavy duty 100% solid copper fixture stem - .115 wall thickness.

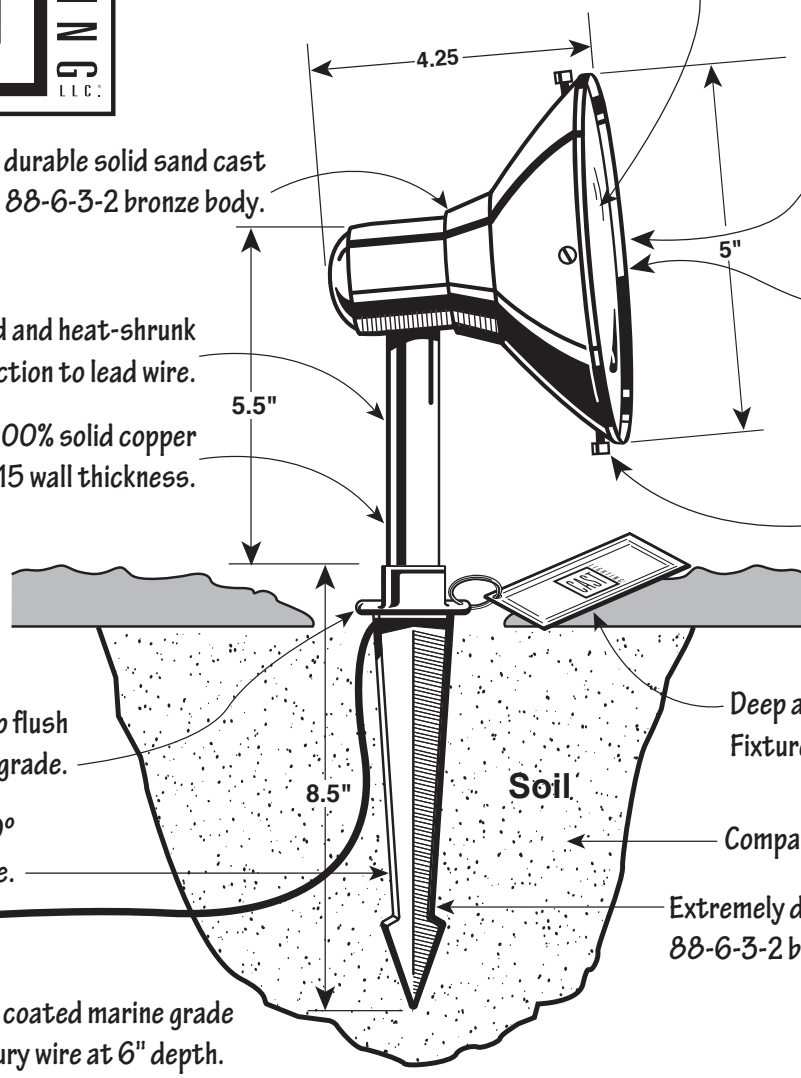

Keep stake top flush w/grade.

Deep acid etch 304 stainless Fixture Record Tag.

Install at 90° to grade.

Compact backfill in 4" lifts.

Extremely durable solid sand cast 88-6-3-2 bronze stake.

#16-2 @25' Tin coated marine grade No-Ox® wire. Bury wire at 6" depth. Coil leftover wire at base of fixture. This allows for future field adjustment of fixture placement if required.

Drawing not to scale

MODEL #	Wall Wash Light Typical Installation Detail
CWW1CB	NOTES: • Max Lamp Rating 35 watt • Includes wedge base Krypton Halogen, 25 watt lamp • Always refer to product instruction sheet prior to installation.
Rev. 1-11-05	
Plan Symbol: 