

# Monetliter BM-0508

Uplighting  
Spot Lighting  
Architectural Lighting  
Fountain/Statue Lighting  
Dock/Deck Lighting  
Sign Lighting  
Wall Lighting  
Cross Lighting  
Reflective Lighting  
Mirror Lighting



**Nightscaping®**  
1705 E. Colton Avenue  
Redlands, California 92374  
Tel: (909) 794-2121  
Fax: (909) 794-7292  
Help Line: (800) 544-4840  
Email: [wlocklin@nightscaping.com](mailto:wlocklin@nightscaping.com)  
<http://www.nightscaping.com>

Uplight tall trees, graze buildings, or backlight distant trees and shrubs with the Nightscaping® Monetliter. Use this fixture anywhere a highly controlled, direct burial uplight is needed. The fixture insert, made of solid cast brass, is adjustable and allows you to precisely position the light produced.

**Standard Lamp:** BM-0508 -LO2036 (Standard)

**Material:** **Outer Body:** Black ABS Conduit  
**Inner Body:** Brass  
**Gimbal Ring:** Stainless Steel

**Finish:** **BM-0508**  
Unpainted ABS Black Direct Burial Conduit Outer  
Body - Brass Inner  
Body (Standard)  
**BM-0508-1, -2, -3, -4, -7, -8, -9, -AV, -VP, -W**  
Unpainted ABS Black Direct Burial Conduit Outer Body -  
Powder-Coated Inner Body (Optional w/surcharge)

**Lens:** Clear Tempered Glass (Standard)

**Socket:** Ceramic G6.35 Bi-Pin

**Mounting:** Direct Burial (Standard)

*Nightscaping*<sup>®</sup> The Safe System

# Monetliter

## BM-0508

*Nightscaping*™ The Safe System

**Alternative Lamps:** BM-0508 -LO1024\*, -LO2006, -LO2012, -LO3512, -LO3520, -LO3540, -LO4208, -LO5012, -LO5024, -LO5038, -LO5055, -LH5024\*, -LH5036\* (Optional)

\* = Surcharge

**Lens:** BM-0508-LO2036 -S Spread Lens (Optional)

**Options:** See above indications

**Accessories:** **Gimbal Ring with Lamp: Replaces existing Monetliter (BM-0508) MR-16 Assembly to Master-liter MR-16**

MR-0600 -LO2036 (Standard)  
 MR-0600 -LO1024\*, -LO2006, -LO2012, -LO3512, -LO3520, -LO3540, -LO4208, -LO5012, -LO5024, -LO5038, -LO5055, -LH5024\*, -LH5036\* (Optional)

\* = Surcharge


**Grates: Fit securely on inside/top of fixture for minimum light output interference but maximum side shielding. Body must be inverted.**

GI-0505 -1, -2, -3, -4, -7, -8, -9, -AV, -VP, -W Inner Round Grate - Aluminum  
 GL-0606-1, -2, -3, -4, -7, -8, -9, -AV, -VP, -W Outer Round Grate - Aluminum  
 GL-0607-1, -2, -3, -4, -7, -8, -9, -AV, -VP, -W Outer Square Grate - Steel  
 GL-0607BR Outer Square Grate - Brass  
 GL-0607BR-1, -2, -3, -4, -7, -8, -9, -AV, -VP, -W Outer Square Grate - Powder-coated Brass

**Lens for Inner Body:**

NS-OK-C (Standard/Accessory) Clear Lens  
 NS-OK-S Spread Lens

**Warranty:** 10-Year 'Repair or Replace' Warranty.

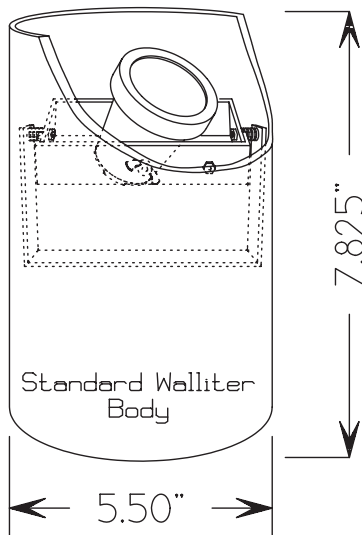

	LO 2036 (BAB) (20W)	42° x 42°
2ft	1'6"	131.3 FC
4ft	3'0"	32.8
6ft	4'7"	14.6
8ft	6'1"	8.2
10ft	7'8"	5.3
12ft	9'2"	3.7
14ft	10'9"	2.7
16ft	12'3"	2.1
18ft	13'9"	1.6
20ft	15'4"	1.3

STANDARD LAMP PHOTOMETRIC

### DESIGN TIP\*

Do not use plexiglass lens option in combination with narrow beam lamps or lamps in excess of 25 watts.