

Wrightliter (ring) BM-2835

Uplighting
Underwater Lighting
Backlighting
Spot Lighting
Architectural Lighting
Fountain/Statue Lighting
Sign Lighting
Wall Lighting
Stairway/Step Lighting
Reflective Lighting
Deck/Dock Lighting



Nightscaping®
1705 E. Colton Avenue
Redlands, California 92374
Tel: (909) 794-2121
Fax: (909) 794-7292
Help Line: (800) 544-4840
Email: wlocklin@nightscaping.com
<http://www.nightscaping.com>

Uplight water falls, ponds or streams with the Nightscaping® Wrightliter featuring a standard ring assembly. Applicable in either wet or dry locations, and with multiple mounting and shielding options available, this solid brass fixture is flexible enough to fit into any of your lighting designs. Specify this fixture with confidence. Like all members of our BrassMaster™ series, the Wrightliter carries a lifetime warranty.

Standard Lamp: BM-2835BR -LO2036 (Standard)

Material: All Pressurized Die-Cast Brass

Finish: BM-2835 BR (Standard) Brass
BM-2835 BR-V Brass-Verde
BM-2835 BR-1, -2, -3, -4, -7, -8, -9, -AV, -VP, -W
(Optional w/surcharge)

Lens: Clear Tempered Glass (Standard)
BM-2835BR-LO2036 -S Spread Lens (Optional)

Socket: Ceramic G6.35 Bi-Pin

Mounting: Recess Mount into Masonry, Wood or Soil (Standard)

Nightscaping™ The Safe System

Wrightliter (ring)

BM-2835



Nightscaping™ The Safe System

Alternative Lamps: BM-2835BR -LO1024*, -LO2006, -LO2012, -LO3512, -LO3520, -LO3540, -LO4208, -LO5012, -LO5024, -LO5038, -LO5055, -LH5024*, -LH5036* (Optional)
-LO5060, -LO2060, -LO3560

* = Surcharge

Lens: See above indications

Accessories:

Pour Sleeve:
PS-0406SS Pour Sleeve

Lens:
NS-OK-C (Standard/Accessory) Clear Lens
NS-OK-S Spread Lens

Shield: Cuts side light when lamp must be exposed to view.
B-0011 Brass - Shield


Stand:
DO-2835BR Vermeer Stand

Lens Holders - Brass:
B-0010 Convert existing BM-2840BR to this Ring Lens Holder. (Also replaces BM-2835BR lens holder)
B-0012 Convert existing BM-2835BR to this Shield Lens Holder. (Also replaces BM-2840BR lens holder)

Mount Plate:
SA-0606BR Brass - Works well in conjunction with Yoke Mount.

Yoke Mount:
SA-1222SS Convert existing BM-2840BR to Yoke Mount. (Also replaces BM-2835BR yoke mount)

Warranty: LIFE 'Repair or Replace' Warranty to original Owner.

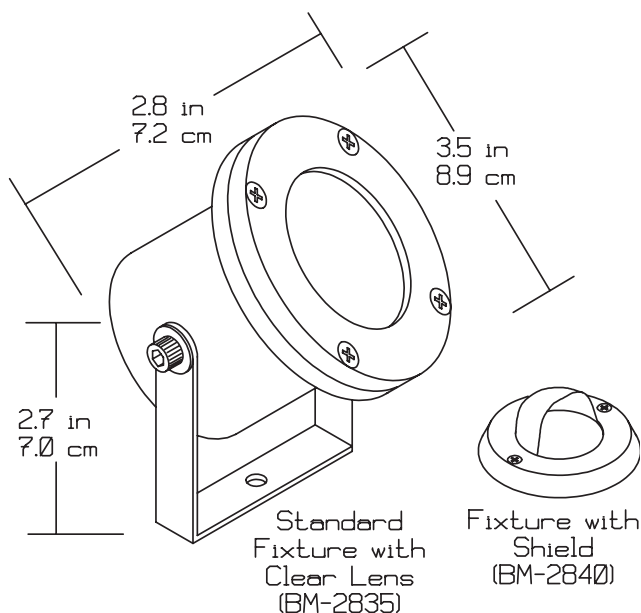

	LO 2036 (BAB) (20W)	42° x 42°
2ft	1'6"	131.3 FC
4ft	3'0"	32.8
6ft	4'7"	14.6
8ft	6'1"	8.2
10ft	7'8"	5.3
12ft	9'2"	3.7
14ft	10'9"	2.7
16ft	12'3"	2.1
18ft	13'9"	1.6
20ft	15'4"	1.3

STANDARD LAMP PHOTOMETRIC