

Neptune (4520)



Cubing/pallet: 65.7 lin. ft (20.2 lin. m)

Units: Variable

Weight/pallet: 2380 lb (1080 kg)

Thickness: 2.95" (75 mm)

Texture: Granitex

8 rows of 8.22 lin. ft (2.51 lin. m) per pallet

	Height in (mm)	Depth in (mm)	Width 1 in (mm)	Width 2 in (mm)
A	2.95 (75)	12.4 (315)	8.9 (225)	6.5 (165)
B	2.95 (75)	12.4 (315)	11.8 (300)	9.45 (240)
C	2.95 (75)	12.4 (315)	14.75 (375)	12.4 (315)

Available in Granitex only



sandlewood
452001



tan
452002



earth brown
452006



shale grey
452008



rusty grey
452009



brick red
452012




limestone
452014




mojave beige
452016

SURROUND SWIMMING POOL WITH PAVING STONES AND POOL COPING CONSTRUCTION ON COMPACTED CRUSHED STONE FOUNDATION.

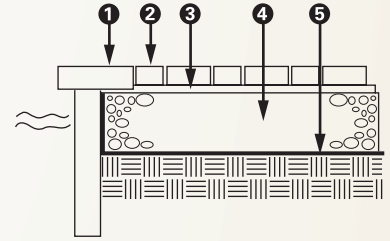

- 1 Neptune pool coping
- 2 Concrete paving stones minimum thickness of 2 3/8" (60 mm)
- 3 1/2" to 1" (15 to 25 mm) bedding sand
- 4 Compacted aggregate foundation
- 5 Geotextile membrane. If necessary, fold up to ends of foundation.

SURROUND SWIMMING POOL WITH PAVING STONES AND POOL COPING CONSTRUCTION ON CONCRETE FOUNDATION.

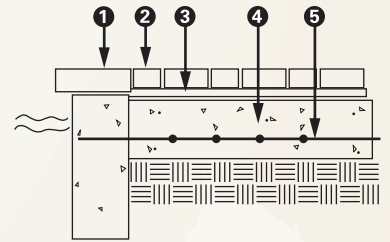

- 1 Neptune pool coping
- 2 Concrete paving stones minimum thickness of 2 3/8" (60 mm)
- 3 1/2" to 1" (15 to 25 mm) bedding sand
- 4 Concrete foundation
- 5 Metal wire mesh or steel grids, as required.

